


Intecma Device Design Data

Dimensions SST330i-M-ES

SimpleStarter with USB, Modbus and External Powersupply

Power Board: PCB Version: PCB1 v7.0 -1420pp 3up panel

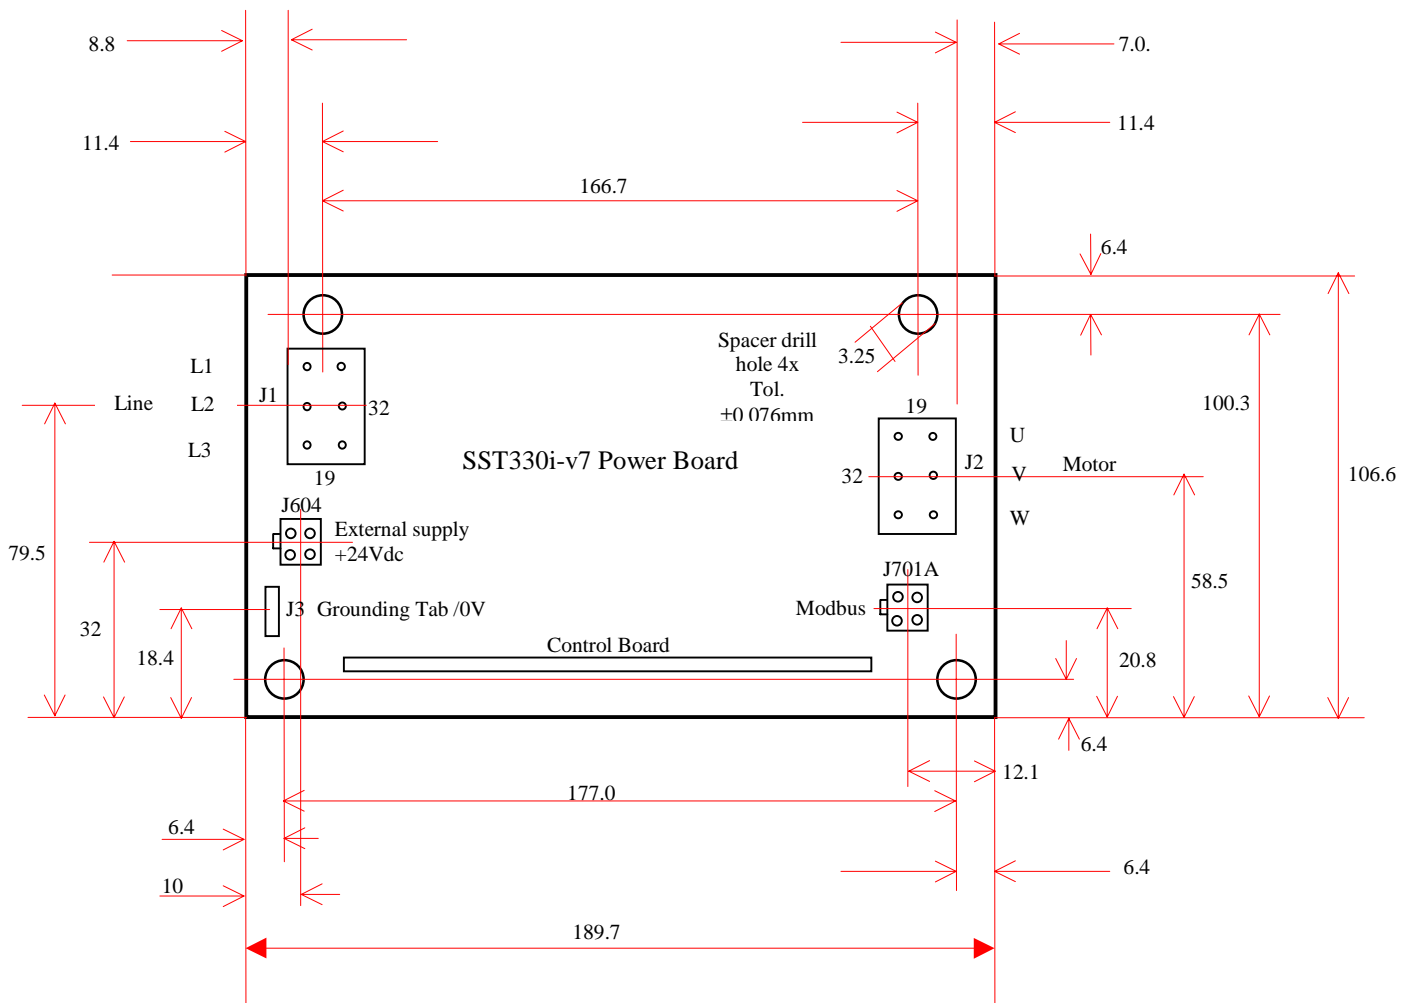


Unit Dimensions LxWxH = 190x107.x49mm .tol: ± 0,20mm
 Mounting holes dia 3.25mm. tol ±0.076mm


Top view

Drawing not to scale

Measures in mm





External Supply
 1= 0V
 4=0V
 2= +24Vdc
 3= +24Vdc



Modbus / RS485
 1 = COM
 2 = A
 3 = NC
 4 = B

Mounting holes PCB
 For M3 nylon spacer
 Minimal spacer length
 12mm

Control Board : PCB Version SST330i-M-ES (PCB2 v6.0-1419pp 10up panel)

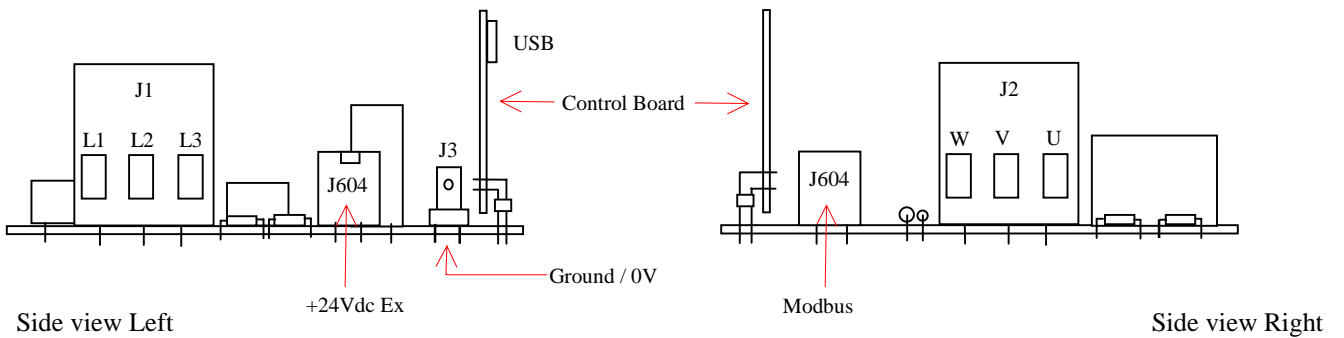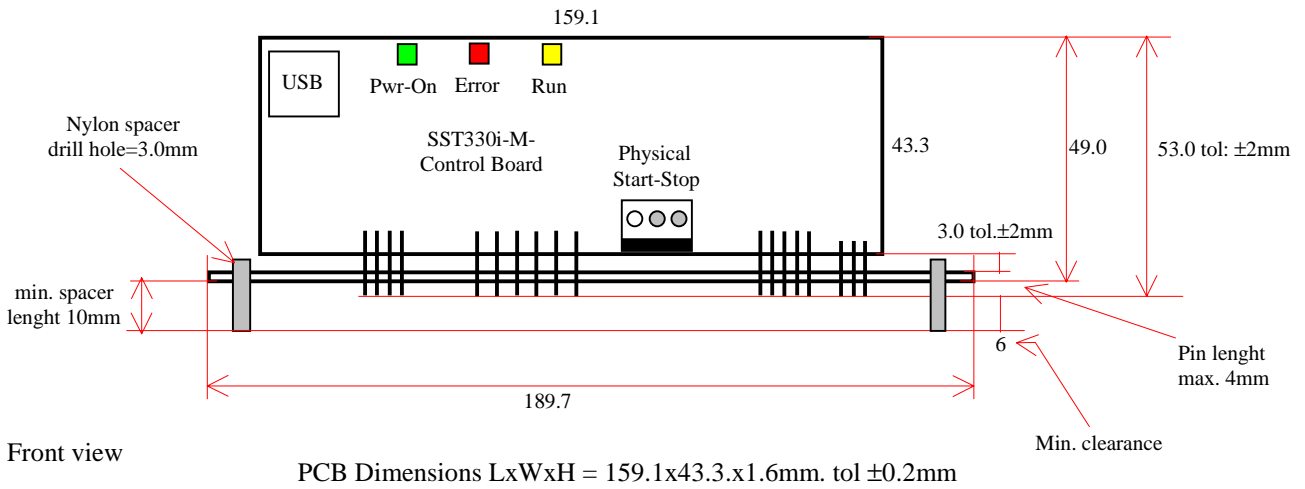

Drawings not to scale

Measures in mm

Build-in Dimensions LxWxH = 210x120x65mm

Take care of sufficient Airflow

Unit weight: approx. 380gr. Nett. tol. ±10gram

PCB Dimensions and PCB data in accordance with IPC-A-600G ClassII